

Milling motor

# FM 1000 PV-ER



Duo-In: The speed can be continuously adjusted to any application, either manually or via the portal interface. Additional LED status display.



The Rapidfix cable enables a quick and easy connection to the portal.



The sound pressure level of the FM 1000 PV-ER is only 71 db (A) and the device is thus.



The MAFELL milling motors are manufactured under the strictest quality controls in the German town of Oberndorf a. N. Before delivery, each milling motor is "run in" in a test cabin. This increases the tool life and the service life.



Highest concentricity due to the filigree coordination of all components and the fact that armature and spindle are manufactured and balanced from one piece



## Product features

- **Extremely quiet**
- **Spindle lock**
- **Made in Germany**
- **LED indication for overload**

## Areas of application

- Model making, mould making, advertising technology, engraving, jewellery, electronics, stonemasonry
- Ideally suited for portal milling machines, cutting tables, grinding devices and flexible shafts
- For wood, metal, plastics, foam, polystyrene, stone


## Product description

With the FM 1000 PV-ER, MAFELL has developed another milling motor "Made in Germany". The high quality standard and well thought-out details make the MAFELL milling motor the best partner in its performance class.

The speed can be infinitely adjusted to any application. In addition, the digital electronics are equipped with soft start, constant speed under load, idle speed reduction and overload protection.

The labyrinth seal of FM 1000 PV-ER permanently protects the spindle and bearing from even the smallest particles, dust and chips.

Your MAFELL dealer - our sales partner:

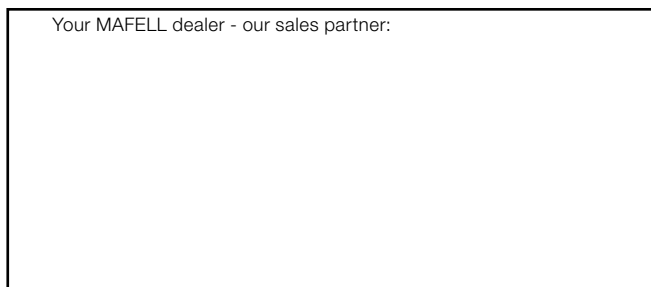

## Technical data

## FM 1000 PV-ER

Nominal power consumption	1.000 W
Universal motor	230 V / 50 Hz
Nominal idling speed	4.000 – 25.000 rpm
Portal connection	M8 / 4-pol.
Power supply in PV operation	8 - 56 V
Portal control	0 - 10 V
Clamping collar / collet chuck	43 mm (1,69 in.) / 8 mm (0,31 in.)
Dimensions (L x W x H)	254 x 79 x 73 mm (10 x 3,11 x 2,87 in.)
Sound pressure level db (A)	71 dB (A)
Weight	1,65 kg (3,64 lbs)

## Models

Milling motor FM 1000 PV-ER	9M0401
-----------------------------	--------

## Scope of supply

- 1 Collet chuck ER 16, 8 mm (0,31 in.)
- 1 Clamping key
- 1 Mains cable 0,75 + 4 m

## Special accessories / tools

Union nut ER 16M, (balanced)	093758
Collet chuck ER 16, 3 mm	093753
Collet chuck ER 16, 4 mm	093754
Collet chuck ER 16, 6 mm	093755
Collet chuck ER 16, 8 mm	093756
Collet chuck ER 16, 3,175 mm (1/8")	093757
Portal control M8 / 4-pol, 5 m	208311